


Fuel Package Tank Rectangular above ground enclosed banded storage tank

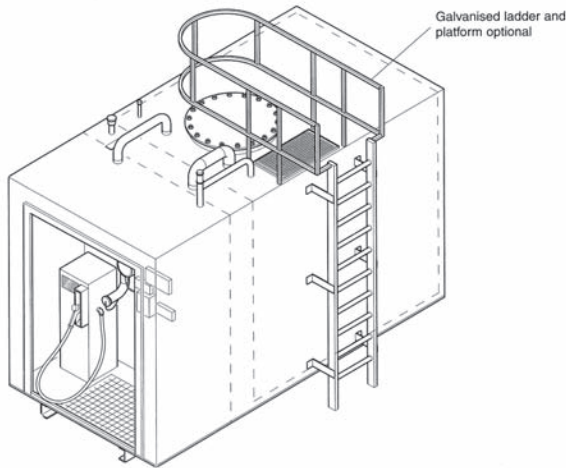

The Fuel Package Tank is an inner storage tank, externally encased within an outer weatherproof bund to ensure any leakage or nominal overflow situation is safely contained.

The Fuel Package Tank is easily transportable as a one-piece unit and reduces costly and time consuming site work.

The Fuel Package Tank is delivered to the customer's premises. If at a later date a new site for the Fuel Package Tank is required it has only to be emptied of contents, cleaned internally, uplifted and transported to its new location.

Advantages


- Weatherproof.
- Space saving.
- Reduced maintenance costs.
- Enclosed banded tank.
- Cuts costly site work.
- Needs only suitable hard standing.
- Easily transportable.
- Overfilled product can be re-used.
- Sizes/capacity to suit most situations.
- Finished in green or black oil resistant paint.
- Clients own in-house colours can be accommodated on request.
- Offloading and positioning facilities available if required.
- The optional security cabinet will extend the overall length of the unit by **750mm**.

Ref	Capacity of Main Tank ltr	Length mm	Width mm	Height mm	Weight Kilos
T30	2,000	1,180	1,100	1,830	865
T31	3,000	1,660	1,180	1,830	1,027
T32	5,000	2,170	1,485	1,830	1,531
T33	7,000	2,520	1,790	1,830	1,940
T34	10,000	3,590	1,790	1,830	2,540
T35	15,000	4,020	2,398	1,830	3,395
T36	20,000	5,360	2,398	1,830	4,285
T37	25,000	6,700	2,398	1,830	5,162
T38	30,000	6,410	3,008	1,830	5,828
T39	40,000	8,550	3,008	1,830	7,474
T40	50,000	10,690	3,008	1,830	8,947
T41	60,000	10,660	3,618	1,830	9,707
T42	70,000	12,440	3,618	1,830	11,790
T43	80,000	14,220	3,618	1,830	13,316

Additional Fittings

- 50mm, 65mm or 80mm fill pipe c/w valves, tanker coupling and cap.
- Venting assembly sized to suit.
- Sludge drain pipe.
- 40mm outlet pipe with valve.
- Electric bund monitoring with alarm.
- Contents gauge in litres.
- Overfill alarm and/or overfill prevention-valve.
- Dipstick, dip pipe, cap and chain.
- Dispensing pumps with safety break couplings and automatic nozzle. (3m hose supplied)
- Fuel monitoring systems.
- Optional galvanised ladder and platform.
- Optional distribution board and lighting.
- Optional security cabinet with aluminium roller shutter door or steel doors.

Fuel Package Tank Safe Rectangular above ground enclosed banded storage tank with secondary removable pitched roof for total security

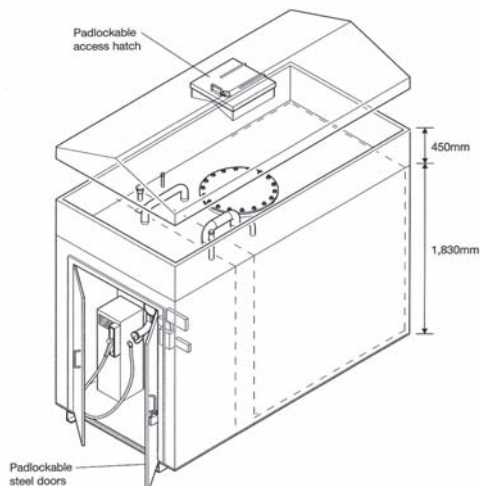

The Fuel Package Tank Safe is an inner storage tank, externally encased within an outer weatherproof bund to ensure any leakage or nominal overfill situation is safely contained.

The top connections, pipework and manway are enclosed by a secondary roof section for total security.

The Fuel Package Tank Safe is easily transportable as a one-piece unit and reduces costly and time consuming site work.

The Fuel Package Tank Safe is delivered to the customer's premises. If at a later date a new site for the Fuel Package Tank Safe is required it has only to be emptied of contents, cleaned internally, uplifted and transported to its new location.

Advantages

- Weatherproof.
- Space saving.
- Reduced maintenance costs.
- Enclosed banded tank.
- Cuts costly site work.
- Needs only suitable hard standing.
- Easily transportable.
- Overfilled product can be re-used.
- Sizes/capacity to suit most situations.
- Finished in green or black oil resistant paint.
- Clients own in-house colours can be accommodated on request.
- Offloading and positioning facilities available if required.
- The optional security cabinet will extend the overall length of the unit by **750mm**.

Ref	Capacity of Main Tank ltr	Length mm	Width mm	Height mm	Weight Kilos
S30	2,000	1,180	1,100	1,830	1,136
S31	3,000	1,660	1,180	1,830	1,344
S32	5,000	2,170	1,485	1,830	1,954
S33	7,000	2,520	1,790	1,830	2,448
S34	10,000	3,590	1,790	1,830	3,171
S35	15,000	4,020	2,398	1,830	4,195
S36	20,000	5,360	2,398	1,830	5,267
S37	25,000	6,700	2,398	1,830	6,326
S38	30,000	6,410	3,008	1,830	7,102
S39	40,000	8,550	3,008	1,830	9,075
S40	50,000	10,690	3,008	1,830	10,876
S41	60,000	10,660	3,618	1,830	11,825
S42	70,000	12,440	3,618	1,830	14,201
S43	80,000	14,220	3,618	1,830	16,023

Additional Fittings

- 50mm, 65mm or 80mm fill pipe c/w valves, tanker coupling and cap.
- Venting assembly sized to suit.
- Sludge drain pipe.
- 40mm outlet pipe with valve.
- Electric bund monitoring with alarm.
- Contents gauge in litres.
- Overfill alarm and/or overfill prevention-valve.
- Dipstick, dip pipe, cap and chain.
- Dispensing pumps with safety break couplings and automatic nozzle. (3m hose supplied)
- Fuel monitoring systems.
- Optional galvanised ladder and platform.
- Optional distribution board and lighting.
- Optional security cabinet with aluminium roller shutter door or steel doors.